



LAT135-H6

LOW VOLTAGE
PICK-UP MOUNTED PLATFORM

NATIONAL
SMALL SERIES
APPROVED

TOYOTA
AUTHORISED
CONVERTER



FULLY
HYDRAULIC
CONTROL



3.5 T GVW



ARTICULATED
BOOM



ON & OFF ROAD



WALK-IN BUCKET



A-FRAME
OUTRIGGERS



EURO 6
COMPLIANCE



Isuzu D-Max



Toyota Hilux


SPECIFICATIONS

	Isuzu D-Max	Toyota Hilux
Working height	13.3m	13.3m
Platform height	11.3m	11.3m
Maximum outreach	6.1m	6.1m
Max. bucket capacity	230kg	230kg
Flyboom	Fixed	Fixed
GVW	3500kg	3500kg
Maximum slope	3° / 5°	3° / 5°
Payload (after driver, passenger & fuel)*	500kg	180kg

*Subject to options fitted

STANDARD

- Fully hydraulic proportional control
- Double A-frame outriggers (front + rear)
- 230kg SWL walk-in bucket
- Access to bucket from ground
- 1kV certified insulation (annual dielectric test required)
- 12V DC emergency lowering system
- Emergency manual hand pump
- Low travel height <2.6m
- Improved on-road and impressive off-road capability
- Driven on a car licence
- Euro 6 compliance
- National Small Series Approved (NSSA) allowing fast delivery
- Two year warranty

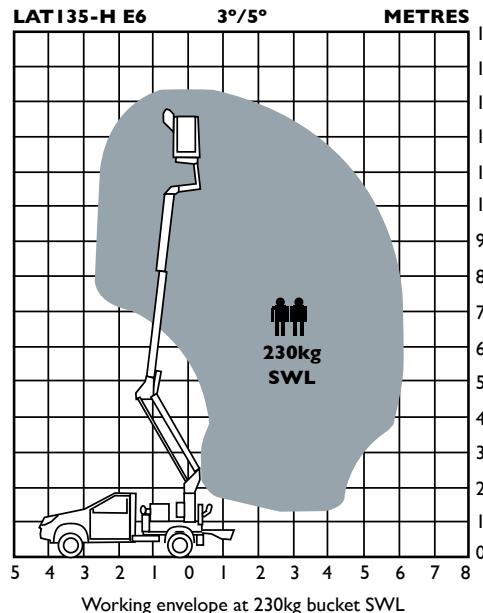

OPTIONS

- Chapter 8 compliance
- Bespoke locker installation
- Aluminium basket
- Full R&M contract available direct from the manufacturer

LAT135-H 6

LOW VOLTAGE
PICK-UP MOUNTED PLATFORM



Easy to use fully hydraulic proportional control



Double A-frame outriggers (front + rear) for narrow, compact set-up



Safe access to bucket from vehicle



Fitted with LV insulation as standard, the LAT135-H E6 features a stronger, lighter boom and a re-engineered pedestal and turret.



Hydraulic, 12V DC emergency ground controls and emergency hand pump



Safe access to bucket from ground

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.



I Altendiez Way,
Latimer Park,
Burton Latimer,
Kettering, NN15 5YT
T: 01536 721010
F: 01536 721111
E: sales@versalift.co.uk
W: www.versalift.co.uk

